



Glo Brite® 7000 Series PF100 Exit Sign

Going green does not have to be expensive

Job Name: _____
Type: _____
Approved By: _____
Distributor: _____

FEATURES:

- Zero energy consumption- zero cost, green design
- Zero maintenance- no bulbs, no battery replacement
- Non-toxic, non-radioactive
- No disposal costs
- Designed for surface flag, ceiling or conduit mounting
- Can be used for both high-level and low-level applications
- Easily movable if egress path changes
- Thin, low profile construction
- Consistent, uniform illumination
- 100 ft. rated, visibility, readability
- Recyclable
- LEED point contributor

TECHNICAL INFORMATION:

- Size: 15-3/8" x 8-3/4" x 3/4"
- Letter Size: 7/8" stroke with 7" letters
- Background: Black, Red, Green
- Illumination: High Visibility Green
- Rated Viewing Distance: 100 feet
- Directional: (2) Field applied Chevrons
- Construction: ABS plastic with photoluminescent panel
- Durability: Explosion-proof/Suitable for Floor Proximity Installation

TESTS PASSED:

UL 924 / ULC Emergency Lighting and Power Equipment listed by UL
 Meets NFPA Life Safety Code 101 and OSHA requirements: International Building and Fire Code 2009, 2012, 2015
 Listed for LED lighting

LIFE EXPECTANCY: 25+ years

POWER REQUIREMENTS:



NO additional electrical or mechanical source required

INSTALLATION:

Surface, flag or ceiling mounted (hardware included). Before installation it must be determined that there is a minimum of 5 Fc of LED, Fluorescent, metal halide or mercury vapor light on the face(s) of the sign at all times during building occupancy. (Conduit bracket sold separately.)

APPLICATIONS:


Both high-level and low location
 Suitable for floor proximity installation

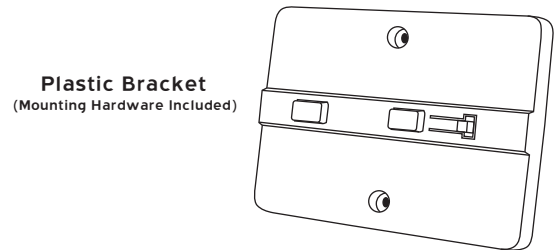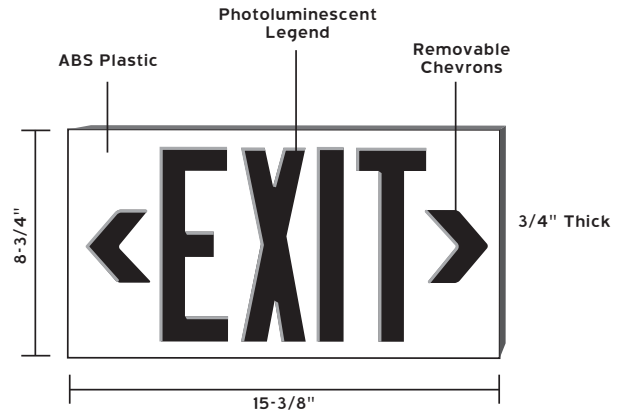

Plastic Bracket
 (Mounting Hardware Included)



Flag Mount Option



Ceiling Mount Option

Catalog #	Frame Color	No. of Faces	View Dist.	Mounting Bracket
70	4 - Green	0 - Single Sided	100	B - Mounting Bracket
	5 - Red	2 - Double Sided		CDT-B - Conduit Bracket
	6 - Black			
70	_____	_____	100	_____

(fill in for model #)



Jessup Manufacturing Company
 ph: 815.385.6650 • fax: 815.385.0079
 Internet: www.jessupmfg.com
 E-mail: jmc@jessupmfg.com



Other photoluminescent components of the Glo Brite® Safety Guidance System include:
 Glo Brite® Egress Pathway Strips, Glo Brite® Tape, Glo Brite® Dots and Arrows,
 Glo Brite® Stripe Tape, Glo Brite® Safety Track, and Glo Brite® Safety Signage.