

BETALUX-E®

LIFE SAFETY SIGN

STANDARD

INSTALLATION INSTRUCTIONS

INCLUDED HARDWARE

DESCRIPTION	QTY.	SPECIFICATIONS
Phillips Head Screws	2	1 1/2"
Phillips Head Self-Tapping screws	2	5/8"
Bracket	1	Choice of Color

PREPARATION

Remove Frame and Window by depressing the frame release button, then select the method of mounting (Surface, Flag, Ceiling, etc...)

SURFACE INSTALLATION

The sign has eight (8) surface mounting holes; select the best two (2) for your application and using the hardware provided, fix to wall.

Put legend in place, then replace the Window and Frame, Layering each as shown in FIG. (B).

BRACKET INSTALLATION

NOTE: Mount Bracket to wall or ceiling using the (2) two 1 1/2" Phillips Head Screws provided BEFORE affixing the sign to the Bracket.

The supplied Bracket can be used for either Ceiling or Flag mounting, as shown. If the Bracket is going to be used, screw the Bracket into position using the two (2) 5/8" Self-Tapping screws provided.

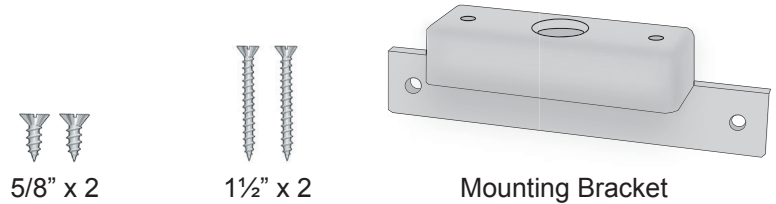


FIG. (A)

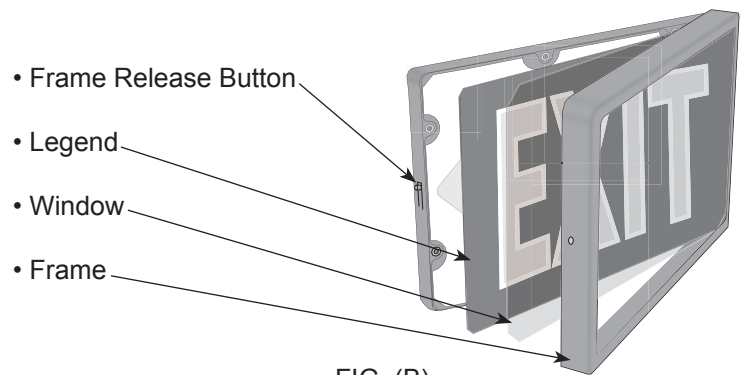


FIG. (B)


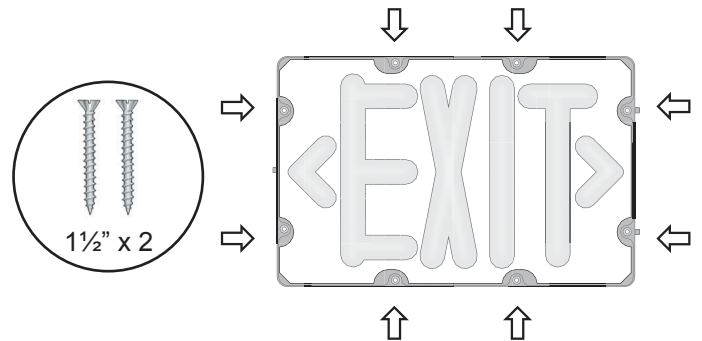


FIG. (C)

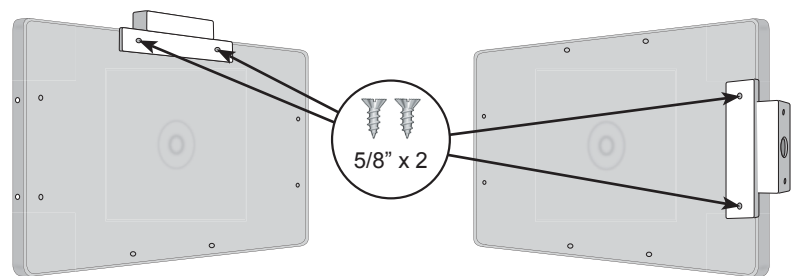


CEILING MOUNT

FLAG MOUNT

FIG. (D)

OPTIONAL HARDWARE


ITEM	DESCRIPTION	QTY.	SPECS.
A	Round Head Bolts	4	1 5/8"
B	Nuts	4	7/32"
C	Spacer	1	Steel
D	Canopy	1	Choice of Color
E	Nut for Pendant Mount	1	Steel
F	Pendant	1	Choice of Color

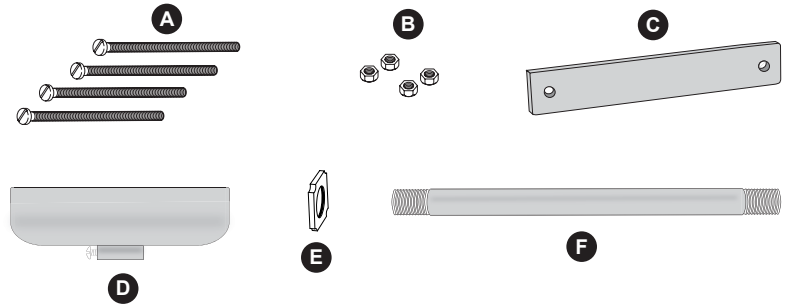

DOUBLE SIGN MOUNTING

The supplied Bracket can be used to mount two back-to-back signs on a wall or ceiling using the supplied 1 1/2" Phillips Round Head Screws. Remove the Frame, Clear Cover and Legend from the two signs. Using the four (4) bolts and nuts provided, affix signs to the Bracket and Spacer as shown. Replace Legends, Clear Windows and Frames.

NOTE: Only Ceiling Mount is shown, for Flag mount, place Bracket and Spacer in appropriate positions.

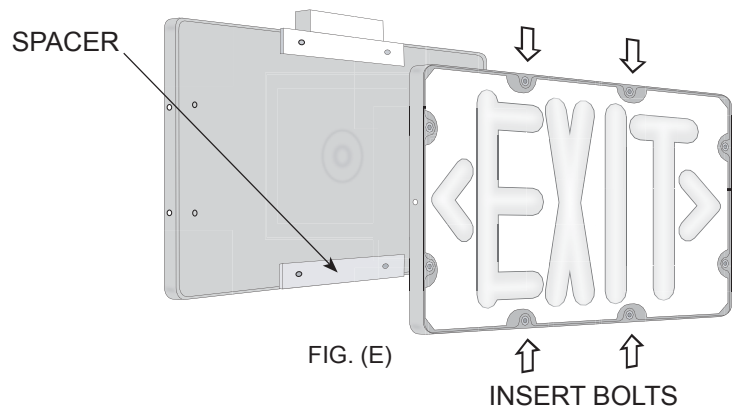

CANOPY MOUNTING

Fix standard pendant mount to ceiling. The Bracket should then be bolted to the Pendant using the Nut provided as shown in FIG. (F). The sign should then be fixed to the Bracket using the Self-Tapping 5/8" screws provided. Replace Legend, Clear Window and Frame.

