

MODEL BX

BETALUX®

**NO WIRING
NO ELECTRICITY
NO BATTERIES
NO MAINTENANCE**



SRB EXIT SIGNS

ALWAYS ON ALWAYS WORKING

- **No Wiring**
- **No Electricity**
- **No Batteries**
- **No Maintenance**
-



BETALUX® (BX) FEATURES

- VANDAL RESISTANT
- OPERATING TEMPERATURE - 76°F TO +212°F
- EXPLOSION PROOF
- WATERPROOF
- REQUIRES NO WIRING
- FIELD SELECTABLE DIRECTION ARROWS
- INSTALLS IN MINUTES
- SUITABLE FOR CLEAN ROOM APPLICATIONS
- NO BULB TO FAIL OR REPLACE
- CORROSION RESISTANT
- FAIL SAFE
- RECYCLABLE IF RETURNED TO MANUFACTURER
- LIGHTWEIGHT
- 10 OR 20 YEAR LIFE
- TOTALLY SELF POWERED

TYPICAL APPLICATIONS

HOTELS



HOSPITALS



SCHOOLS



AIRPORTS



FACTORIES



JAILS



* NO ELECTRICITY


* NO BATTERIES

* ALWAYS ON

* SELF-POWERED

*NO MAINTENANCE

SPECIFICATIONS

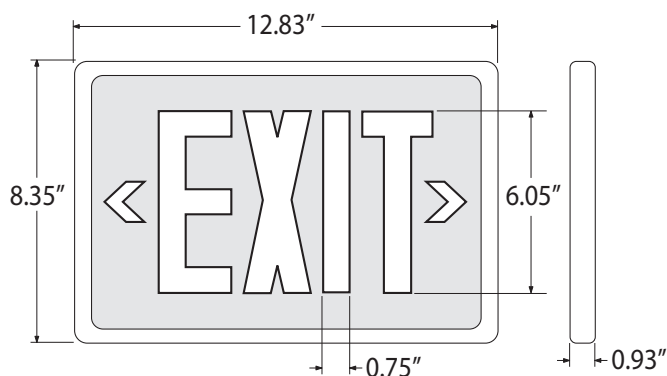

ILLUMINATION SOURCE

- Borosilicate (hard) glass
- Internally coated with phosphorescent powder
- Filled with Tritium gas

BRIGHTNESS

- Minimum brightness at time of manufacture of 0.15 foot lamberts.

CONSTRUCTION

- Encased in high-impact, fire-retardant ABS plastic

COMPLIES WITH:

- NFPA Life Safety Code 101
- U.L. 924
- City of Los Angeles
- State of California
- Council of American Building Officials (ICBO, SBCCI)
- OSHA
- USNRC
- ISO 9001

* NO ELECTRICITY

* NO BATTERIES

* ALWAYS ON

* SELF-POWERED

*NO MAINTENANCE

ORDERING INFORMATION

| MODEL | LIFE IN YEARS | FRAME COLOUR | FACES | LEGEND COLOUR | ACCESSORIES |
|-------|---------------|--------------|------------|---------------|---------------------------|
| BX | 10 - 10 Years | WH - White | S - Single | RD - Red | WG - Wire Guard |
| | 20 - 20 Years | BK - Black | D - Double | GN - Green | AF - Aluminum Frame |
| | | | | | PC - Polycarbonate Window |
| | | | | | PM - Pendant Mount |
| | | | | | SC - Security Cover |
| | | | | | |
| | | | | | |

ORDERING EXAMPLE: BX-10-BK-S-RD = BX, 10 Year, Black Frame, Single Face Sign with Red Legend