



# Glo Brite® 7000 Series PM100 Exit Signs

*Going green does not have to be expensive*

**FEATURES:**

- Zero energy consumption - zero cost, green design
- Zero maintenance - no bulbs, no battery replacement
- Non-toxic, non-radioactive
- No disposal cost
- Designed for surface, flag, ceiling or conduit mounting
- Can be used for both high-level and low-level applications
- Movable if egress paths change
- Thin, low profile construction
- Consistent, uniform illumination
- Visible at 100 feet
- Recyclable
- LEED points qualified
- Non-toxic, non-radioactive
- LED or fluorescent light activation

**TECHNICAL INFORMATION:**

Sizes: 15-7/8" x 8-5/8" x 3/8"  
 Letter size: 7"  
 Background: Black, Red, Green  
 Illumination: High Visibility Green  
 Visibility: 100 feet  
 Directional: 2 included (Field Applied)  
 Construction: ABS Plastic panel/photoluminescent lettering  
 Durability: Explosion-proof for areas requiring explosion-proof exit signage

**TESTS PASSED:**

UL 924 Emergency Lighting and Power Equipment listed by UL Meets NFPA Life Safety Code 101 and OSHA requirements: International Building and Fire Code 2009, 2012, 2015  
 Listed for LED lighting

**LIFE EXPECTANCY:** 25+ years

**POWER REQUIREMENTS:**

NO additional electrical or mechanical source required

**INSTALLATION:**



Surface, flag or ceiling mounted (hardware included). Before installation it must be determined that there is a minimum of 5 FC of LED or fluorescent light on the face(s) of the sign at all times during building occupancy. (Conduit bracket sold separately.)

**APPLICATIONS:**


Both high-level and low-level  
 Suitable for floor proximity installation

Catalog #	Frame Color	No. of Faces	
70	7 - Red	0 - Single Sided	B - Mounting Bracket CDT-B - Conduit Bracket
	8 - Green	2 - Double Sided	
	9 - Black		
70			-B (fill in for model #)

Job Name: \_\_\_\_\_  
 Type: \_\_\_\_\_  
 Approved By: \_\_\_\_\_  
 Distributor: \_\_\_\_\_

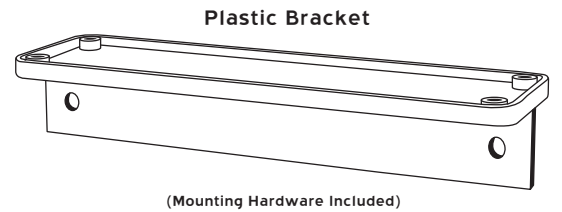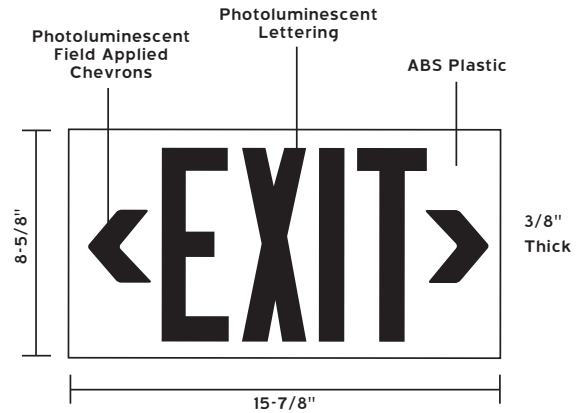

Flag Mount Option



Ceiling Mount Option



Jessup Manufacturing Company  
 ph: 815.385.6650 fax: 815.385.0079  
 Internet: www.jessupmfg.com  
 E-mail: jmc@jessupmfg.com



Other photoluminescent components of the Glo Brite® Safety Guidance System include: Glo Brite® Egress Pathway Strips, Glo Brite® Tape, Glo Brite® Dots and Arrows, Glo Brite® Stripe Tape, Glo Brite® Safety Track, and Glo Brite® Safety Signage.